

Glamox® | Heating

Heating made smart



H60



3001

Heaters with compact and timeless design

Heating made smart

Adax AS was founded in Svelvik, Norway, in 1948, and is the market leader in Scandinavia. We are pioneers within innovation and design, and were the first company in Scandinavia to introduce integrated WiFi and Bluetooth in our heaters. We're known for our timeless, Norwegian design, and make products to keep people warm for generations. Adax has a long tradition of sales and production of Glamox Heating products.



Sustainability and the environment

We manufacture our products at our factory in Panevėžys, Lithuania, using 100% renewable energy. What's more, we are phasing-in more eco-friendly and recyclable packaging for all our products, certified according to the requirements of the Forest Stewardship Council (FSC).

Packaging certified by the FSC has to comply to ten principles. They are intended to ensure sustainable harvesting of forests, eco-friendly production and the protection of labour rights throughout the production process, according to international laws and regulations. That applies throughout the lifecycle of the packaging, and means the least possible impact on the environment. Learn more on FSC at www.fsc.org.



Warranty

We are confident that our products will provide heat for many years, and therefore provide a 5-year warranty on the products we make at our factories. Many of our products have replaceable thermostats, which can be easily replaced should a defect occur. That avoids having to replace the entire heater, and protects the environment.

Easy connection with Bluetooth and Wi-Fi

Nowadays, we control much of our lives using our mobile phones.

The Glamox Heating Wi-Fi app gives you full control, letting you change and check the temperature in your home and its various rooms quickly and easily.

Smart heating

Using a weekly program, you can quickly set up routines for heating hour-by-hour or for the entire week. You choose the temperature for when you're at home, asleep or away.


We recommend using weekly programs to automatically adjust the temperature when you're sleeping or away. This will cut your electricity consumption and save you unnecessary expense.

Setting up your own weekly programs for each room at the temperature you want is simple. You can set different comfort and night temperatures for bedrooms and lounge. The comfort temperature in the lounge could be 22 degrees for instance, but 18 degrees in the bedroom.

Using the "Away" holiday mode means you can reduce the temperature of all heaters in the house when away on holiday.


Main functions:

- Use the Glamox Heating Wi-Fi app to control multiple residences (your house, hut or holiday apartment for instance).
- Unlimited number of radiators and rooms in each home.
- Set up weekly programs to adjust the temperature at home according to your routines.
- Check your electricity consumption by location, room, week or month.
- Invite the family or friends to control your home or hut.
- Activate child locks to prevent children manually adjusting radiator temperature.
- Integration with Google Home – "Talk to your heaters" – increase or decrease the temperature or ask Google what the temperature is in a given room.

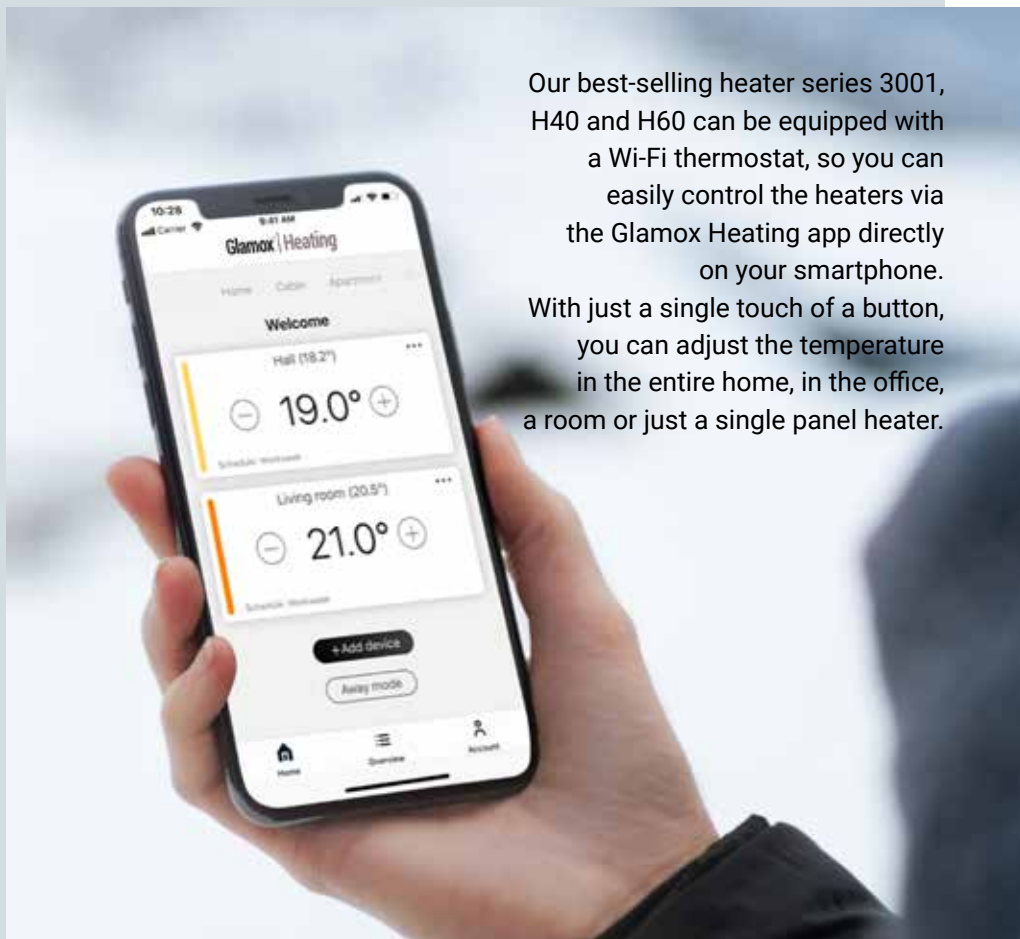

Our best-selling heater series 3001, H40 and H60 can be equipped with a Wi-Fi thermostat, so you can easily control the heaters via the Glamox Heating app directly on your smartphone.

With just a single touch of a button, you can adjust the temperature in the entire home, in the office, a room or just a single panel heater.



Download Glamox Heating WiFi from Google Play for Android or App Store for iPhone.

3001

Panel heater with a focus on function, flexibility and energy efficiency.





Now you can
manage both
old and new
3001 heaters
with Wi-Fi



Glamox Heating 3001 has a functional design that allows the heat to be sent out quickly into the room. Available in several powers from 250 W to 2000 W. Designed for use in residential and commercial buildings. 3001 is developed as a "plug-in" where you can choose from several different thermostats.

The heater has minimal dust combustion due to the large cooling surface of the element. It has no sharp edges and has a smooth and durable surface. The heater is protected against overheating.

3001 is also available in editions TPVD60 which has a maximum surface temperature at 60°C and is splashproof (IP24).



futurehome




H60

Our exclusive
panel heater with
a hardened glass
surface



Glamox Heating H60 is our newest exclusive panel heater. With a hardened glass surface and mirror finish, it adds elegance to your interior.

- Choose from several different thermostats, including WiFi with Bluetooth thermostat (WT2) where you can remotely control your heater from the Glamox Heating WiFi app.
- Connect easily to your Wi-Fi router at home, at the office, or at your cabin.
- Adjust temperature with the Glamox Heating app or locally on the panel heater
- H60 is splashproof (IP24), double insulated (Cl. II) and protected against overheating.
- H60 has a hardened glass surface
- Choose between three different thermostats; WiFi (WT2), Digital (DT) and Slave-modul (SLX).
- 5 years warranty
- Available in the colors White RAL 9016 and Black RAL 7021
- Available as high (H: 340mm) and low (H: 222mm)
- Can be mounted on floor stand (optional)

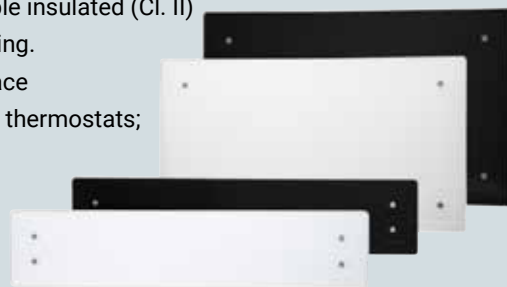

futurehome



Replaceable
thermostat



Hardened
glass surface



Overheating
protection



Double
insulated



Splash proof
(IP 24C)



Five years
warranty




H40

Developed from Scandinavia's best-selling heater.

Glamox Heating H40 with Wi-Fi is not just a heater, but also a part of your interior. Developed from Scandinavia's bestselling heater series, it is now delivered with an updated and minimalistic design.

- Choose from several different thermostats, including Wi-Fi with Bluetooth thermostat (WT2) where you can remotely control your heater from the Glamox Heating Wi-Fi app.
- Connect easily to your Wi-Fi router at home, at the office, or at your cabin.
- Adjust temperature with the Glamox Heating app or locally on the panel heater
- H40 is splashproof (IP24), double insulated (Cl. II) and protected against overheating.
- Choose between three different thermostats; Wi-Fi (WT2), Digital (DT) and Slave-module (SLX).
- 5 years warranty
- Available as high (H: 330mm) and low (H: 210mm)
- Available in three colors; White RAL 9016, Sparkling Grey and Pearl Black RAL 7021
- Can be mounted on floor stand (optional)



futurehome



Replaceable thermostat



Overheating protection



Double insulated



Splash proof (IP 24C)



Five years warranty



A floor stand makes it possible to place a heater anywhere on the floor. Available as an option.

3001 WiFi & Bluetooth thermostats

WiFi thermostat for the Glamox Heating 3001 range

2nd generation – upgraded with WiFi & Bluetooth for simple installation.

Easy startup and able to support multiple smarthouse integrations and User API for your dedicated setup and integration. The thermostat works on 230V and 400V heaters.

WiFi thermostats can either be controlled via the Glamox Heating WiFi app when connected to a network, or manually directly on the thermostat.

If the temperature is adjusted manually when the heater is connected to WiFi, the app will be updated and synchronised according to manual adjustments made on the heaters.

You can activate day and night turn-down in the Glamox Heating WiFi app, activate 'holiday' mode according to the desired temperature and an overview of heater temperatures by room and home.

Item no.: 755222800/EI no.: 5400655

3001 – DT2 Digital thermostat 230V

Digital thermostat DT2 230V for the 3001 TPA/TLO range. This digital thermostat meets all requirements according to the EU Eco Design Directive. A digital thermostat gives you simple, effective control of your heaters, supporting all functions for efficient heat control, such as:

- Day and night turn-down program
- Open window – turns down the temperature if airing the room and the temperature drops
- Child lock – locks the thermostat, temperature cannot be changed

Item no.: 755222410/EI no.: 5428456

3001 – DTV2 Digital thermostat IP24 230V

DTV2 is approved for wetrooms, is splashproof (IP24), and has the same functions as a standard DT2. Used for the 3001 TPVD60 range.

Item no.: 910035/EI no.: 5428458

3001 – SLA 230 Slave module

Designed for use with a 230 Volt control signal to switch heaters on and off.

Regulation can be done from a central thermostat, regulator or switch. The 230 Volt signal does not replace the supply of electricity to the radiators.

Signal input to the SLA 230 is via two core cable from behind the slave module.

Item no.: 755222430/EI no.: 5428460

3001 – SLX2 Slave module 230V

Slave module SLX2 230V for the Glamox Heating 3001 TPA/TLO range.

Converts standard heaters to slave heaters which can be controlled by all types of central thermostats. Regulation from a centrally-located room thermostat (mechanical or electronic). When the central room thermostat switches on or off, heaters with SLX will follow suit. The central room thermostat must be dimensioned to be able to tolerate the total output regulated.

Item no.: 755222470/EI no.: 5428462

3001 – SLA 5/24 Slave module 230/400V

Slave module for the Glamox Heating 3001 range, works on both 230V and 400V heaters.

SLA 5/24 can be controlled by all systems with 5-24 Volt DC/AC control signals.

When electricity is connected, the SLA 5/24 will switch on the heating element, providing heat for the period the signal voltage is supplied.

The slave module switches the heater on and off in line with an external thermostat.

Item no.: 755222432/EI no.: 5428461

3001 – EIB Slave module

Slave module EIB 230/400V for the Glamox Heating 3001 TPA/TLO range.

The EIB module is used to facilitate the radiator being regulated by the universal interface (ABB) US/U 2.2 (two channels) and US/U 4.2 (four channels).

When electricity in the voltage range of 3.5V – 5V is supplied to the EIB slave input, the heating element will switch itself on and continue to heat as long as the supply is connected. The heater must be connected to fixed voltage.

Item no.: 912400/EI no.: 5428464



WT2 thermostat with Wi-Fi and Bluetooth



DT2/DTV2 Digital thermostat



SLA 5/24 Slave module 230V/400V



SLA 230/SLX2 Slave module



EIB Slave module 230V/400V



WT2 - Wi-Fi and Bluetooth thermostat



DT - Digital thermostat



SLX - Slave module

H40/H60 WiFi & Bluetooth thermostat

WiFi thermostat for the Glamox Heating H40 and H60 range

2nd generation – upgraded with WiFi & Bluetooth for simple installation. Select the colour to match your heater, black or white. Easy startup and able to support multiple smarthouse integrations and User API for your dedicated setup and integration. The thermostat works on 230V and 400V heaters.

WiFi thermostats can either be controlled via the Glamox Heating WiFi app when connected to a network, or manually directly on the thermostat. If the temperature is adjusted manually when the heater is connected to WiFi, the app will be updated and synchronised according to manual adjustments made on the heaters.

You can activate day and night turn-down in the Glamox Heating WiFi app, activate 'holiday' mode according to the desired temperature and an overview of heater temperatures by room and home.

Item no.: 910001 – White WiFi & Bluetooth Thermostat 230/400V/EI no.: 5428596

Item no.: 910002 – Black WiFi & Bluetooth Thermostat 230/400V/EI no.: 5428597

H40/H60 Digital thermostat

Digital thermostat for the Glamox Heating H40 and H60 range.

The Glamox Heating Digital thermostat meets all requirements according to the EU Eco Design Directive and you can choose between black and white versions. It works with 230V and 400V heaters.

A digital thermostat supports all functions for effective heat control with functions such as:

- Day and night turn-down program
- Open window – turns down the temperature if airing the room and the temperature drops
- Child lock – locks the thermostat, temperature cannot be changed

Item no.: 910011 – White Digital Thermostat 230/400V/EI no.: 5428594

Item no.: 910016 – Black Digital Thermostat 230/400V/EI no.: 5428595

H40/H60 SLX Slave module 230/400V

SLX slave module for the Glamox Heating H40 and H60 range. Comes in black and white versions.

Works on both 230V and 400V radiators.

SLX is a plug-in module which converts standard Glamox Heating H40/H60 heaters to pure slave heaters. Regulation from a centrally-located room thermostat (mechanical or electronic).

When the central room thermostat switches on or off, heaters with SLX will follow suit. The central room thermostat must be dimensioned to be able to tolerate the total output regulated.

Item no.: white 910026/EI no.: 5428592

Item no.: black 910027/EI no.: 5428593

H10

Economical panel heater for all types of small rooms. Choose between stylish panel heater or elegant glassfront.



H10

A stylish and economical panel heater for all types of small rooms. Reliable thermostat function and precise regulation make the H10 a suitable product for both home and cottage.

- Easy adjustable thermostat
- Protected against overheating
- IP 24 approved for wet rooms
- Double insulated (Cl. II)
- Color: White RAL 9016
- 5 year warranty



H10. 330 mm high, length 400 mm


H10	Watt	Color	Art.no.	EAN.no.
H10 02 ET	250	White	737020	7040667370200





GVR

Reliable infrared heaters with radiant and comfortable heat.

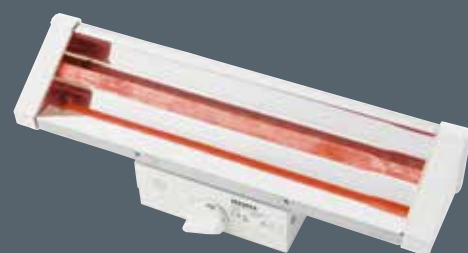

H10 with white glass front

A stylish and economical panel heater for all types of small rooms. Reliable thermostat function and accurate regulation makes H10 with glass front a suitable product for both home and cottage.

- Easy adjustable thermostat
- Hardened glass surface
- Protected against overheating
- IP 24 approved for wet rooms
- Double insulated (Cl. II)
- Color: White
- 5 year warranty




H10 with glass front. 328 mm high, 400 mm length

H10	Watt	Color	Art.no.	EAN.no.
H10 02 ET Glass	250	White	737820	7040667378206

- GVR - Splashproof and approved for wetrooms. (IP44).
- 100 mm High, 132 mm deep.
- Color: RAL 9010
- 5 year warranty

GVR	Watt	Length	Art.no.	EAN.no.
GVR 505 B	500	440	591210	7040665912105
GVR 507 B	750	605	592210	7040665922104
GVR 510 B	1000	1740	593210	7040665932103
GVR 505	500	440	591010	7040665910101
GVR 507	750	605	592010	7040665920100
GVR 510	1000	1740	593010	7040665930109

Power Step 1	Power Step 2	Power Step 3	Power Step 4
100W	200W	300W	500W
150W	300W	450W	750W
200W	400W	600W	1000W



H30

Design panel heater
with digital thermostat



*A floor stand makes it possible
to place a heater anywhere on the floor.
Available as an option.*

H30 is an design award-winning energy saver and has been the bestselling panel heater in Scandinavia since it was launched in 2007. The panel heater has a slim and timeless design that will fit in well with your home interior.

H30 is easy to mount, and has a reliable thermostat function with digital display. The thermostat also has a built-in day and night saving function, to help reduce your electricity consumption.

- Easy adjustable thermostat and digital display
- Week program
- Built-in day and night saving function
- IP20
- Grounded product (Cl. I)
- Protected against overheating
- Cable length 1,3 m
- Color: White RAL 9016
- 5 year warranty



Week
program



Overheating
protection

22 °C
Digital
thermostat



Five years
warranty

Technical details

3001 TPA without thermostat. Height 350 mm

TPA	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
TPA 04	400	4-8 m ²	White	503	765042030	7040660023011
TPA 06	600	7-11 m ²	White	651	765062030	7040660023066
TPA 08	800	9-13 m ²	White	813	765082030	7040660023110
TPA 10	1000	12-16 m ²	White	975	765102030	7040660023165
TPA 12	1200	15-19 m ²	White	1065	765122030	7040660023202
TPA 15	1500	18-22 m ²	White	1355	765152030	7040660023240
TPA 20	2000	27-31 m ²	White	1669	765202030	7040660023288

3001 TLO without thermostat. Height 180 mm

TLO	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
TLO 03	250	2-6 m ²	White	484	766032030	7040660023325
TLO 05	500	4-8 m ²	White	803	766052030	7040660023349
TLO 07	700	9-13 m ²	White	1049	766072030	7040660023363
TLO 10	1000	12-16 m ²	White	1429	766102030	7040660023400
TLO 14	1400	18-22 m ²	White	1743	766142030	7040660023448

3001 TPVD60 without thermostat. Low surface temperature of max 60°C and splashproof (IP24). Height 355mm

TPVD60	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
TPVD60 04	400	4-8 m ²	White	813	768042325	7040660042784
TPVD60 06	600	7-11 m ²	White	1065	768062325	7040660042791
TPVD60 08	800	9-13 m ²	White	1669	768082325	7040660042807

3001 Thermostats

Thermostats	Art.no. 230V	EAN.no. 230V
WT2 Wi-Fi and Bluetooth Thermostat 230V	755222800	7040660147762
DT Digital thermostat 230V	755222410	7054130036838
DTV Digital thermostat IP24 230V	910035	7040669100355
SLA Slave-module 5/24	755222432	7054130121978
SLA Slave-module 230V	755222430	7054130121985
SLX Slave-module 230V	755222470	7040660147687
FIB Slave-module	912400	7040669124009

3001 Curtain rail TPC: High TPA/TPVD60, TPL: Low TLO

TPC/TPL	Length	Art.no.	EAN.no.
Curtain rail TPC04 for 400 Watt	368	755400022	7040660042456
Curtain rail TPC06 for 600 Watt	516	755400012	7040660042463
Curtain rail TPC08 for 800 Watt	678	755400013	7040660042470
Curtain rail TPC10 for 1000 Watt	840	755400014	7040660042487
Curtain rail TPC12 for 1200 Watt	930	755400015	7040660042494
Curtain rail TPC15 for 1500 Watt	1220	755400016	7040660042500
Curtain rail TPC20 for 2000 Watt	1534	755400023	7040660042517
Curtain rail TPL03 for 250 Watt	349	755400018	7040660042524
Curtain rail TPL05 for 500 Watt	669	755400024	7040660042531
Curtain rail TPL07 for 700 Watt	914	755400019	7040660042548
Curtain rail TPL10 for 1000 Watt	1294	755400020	7040660042555
Curtain rail TPL14 for 1400 Watt	1608	755400025	7040660042562

H60 without thermostat. Height 340 mm, depth 87 mm.

H60 H	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
H60 H 04	400	4-8 m ²	White	606	887001	7040668870013
H60 H 06	600	7-11 m ²	White	676	887002	7040668870020
H60 H 08	800	9-13 m ²	White	790	887003	7040668870037
H60 H 10	1000	12-16 m ²	White	850	887004	7040668870044
H60 H 12	1200	15-19 m ²	White	1024	887005	7040668870051
H60 H 04	400	4-8 m ²	Black	606	887201	7040668872017
H60 H 06	600	7-11 m ²	Black	676	887202	7040668872024
H60 H 08	800	9-13 m ²	Black	790	887203	7040668872031
H60 H 10	1000	12-16 m ²	Black	850	887204	7040668872048
H60 H 12	1200	15-19 m ²	Black	1024	887205	7040668872055

H60 without thermostat. Height 222 mm, depth 87 mm.

H60 L	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
H60 L 06	600	7-11 m ²	White	964	897002	7040668970027
H60 L 08	800	9-13 m ²	White	1144	897003	7040668970034
H60 L 10	1000	12-16 m ²	White	1368	897004	7040668970041
H60 L 06	600	7-11 m ²	Black	964	897202	7040668972021
H60 L 08	800	9-13 m ²	Black	1144	897203	7040668972038
H60 L 10	1000	12-16 m ²	Black	1368	897204	7040668972045

Thermostats and accessories H40/H60

	Art.no. White	Art.no. Black	EAN.no.White	EAN.no.Black
Thermostat WT2 230/400V	910028	910029	7040669100287	7040669100294
Thermostat DT 230/400V	910021	910024	7040669100218	7040669100294
Slave-module SLX 230/400V	910026	910027	7040669100263	7040669100270
Floor Stand High	914010		7040669140108	
Floor Stand Low	914011		7040669140115	

H30 with digital thermostat. Height 370 mm, depth 90 mm.

H30 H KDT	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
H30 H 10 KDT	400	4-8 m ²	White	474	670004	7040666700046
H30 H 06 KDT	600	7-11 m ²	White	589	670006	7040666700060
H30 H 08 KDT	800	9-13 m ²	White	704	670008	7040666700084
H30 H 10 KDT	1000	12-16 m ²	White	762	670010	7040666700107
H30 H 12 KDT	1200	15-19 m ²	White	934	670012	7040666700121
H30 H 14 KDT	1400	18-22 m ²	White	1042	670014	7040666700145
H30 H 20 KDT	2000	27-31 m ²	White	1394	670020	7040666700206

H30 with digital thermostat. Height 200 mm, depth 90 mm.

H30 L KDT	Watt	Room size	Color	Length	Art.no. 230V	EAN.no. 230V
H30 L 06 KDT	600	7-11 m ²	White	870	680006	7040666800067
H30 L 08 KDT	800	9-13 m ²	White	1050	680008	7040666800081
H30 L 10 KDT	1000	12-16 m ²	White	1280	680010	7040666800104
H30 L 12 KDT	1200	15-19 m ²	White	1450	680012	7040666800128

H40 without thermostat. Height 330 mm, depth 87 mm.

H40 H	Color	Watt	Room size	Length	Art.no. 230V	EAN.no. 230V
H40 H 02	White	250	3 m ²	520	617000	7040666170009
H40 H 04	White	400	5 m ²	565	617001	7040666170016
H40 H 06	White	600	8 m ²	635	617002	7040666170023
H40 H 08	White	800	10 m ²	750	617003	7040666170030
H40 H 10	White	1000	13 m ²	809	617004	7040666170047
H40 H 12	White	1200	15 m ²	984	617005	7040666170054
H40 H 14	White	1400	18 m ²	1094	617006	7040666170061
H40 H 20	White	2000	25 m ²	1403	617008	7040666170085
H40 H 02	Black	250	3 m ²	520	617200	7040666172003
H40 H 04	Black	400	5 m ²	565	617201	7040666172010
H40 H 06	Black	600	8 m ²	635	617202	7040666172027
H40 H 08	Black	800	10 m ²	750	617203	7040666172034
H40 H 10	Black	1000	13 m ²	809	617204	7040666172041
H40 H 12	Black	1200	15 m ²	984	617205	7040666172058
H40 H 14	Black	1400	18 m ²	1094	617206	7040666172065
H40 H 20	Black	2000	25 m ²	1403	617208	7040666172089
H40 H 02	Grey	250	3 m ²	520	617300	7040666173000
H40 H 04	Grey	400	5 m ²	565	617301	7040666173017
H40 H 06	Grey	600	8 m ²	635	617302	7040666173024
H40 H 08	Grey	800	10 m ²	750	617303	7040666173031
H40 H 10	Grey	1000	13 m ²	809	617304	7040666173048
H40 H 12	Grey	1200	15 m ²	984	617305	7040666173055
H40 H 14	Grey	1400	18 m ²	1094	617306	7040666173062
H40 H 20	Grey	2000	25 m ²	1403	617308	7040666173086

H40 without thermostat, Height 210 mm, depth 87 mm.

H40 L	Color	Watt	Room size	Length	Art.no. 230V	EAN.no. 230V
H40 L 02	White	250	3 m ²	655	627000	7040666270006
H40 L 04	White	400	5 m ²	783	627001	704066627013
H40 L 06	White	600	8 m ²	1005	627002	704066627020
H40 L 08	White	800	10 m ²	1186	627003	704066627037
H40 L 10	White	1000	13 m ²	1380	627004	704066627044
H40 L 12	White	1200	15 m ²	1548	627005	704066627051
H40 L 14	White	1400	18 m ²	1760	627006	704066627068
H40 L 02	Black	250	3 m ²	655	627200	7040666272000
H40 L 04	Black	400	5 m ²	783	627201	7040666272017
H40 L 06	Black	600	8 m ²	1005	627202	7040666272024
H40 L 08	Black	800	10 m ²	1186	627203	7040666272031
H40 L 10	Black	1000	13 m ²	1380	627204	7040666272048
H40 L 12	Black	1200	15 m ²	1548	627205	70406662720550
H40 L 14	Black	1400	18 m ²	1760	627206	7040666272062
H40 L 02	Grey	250	3 m ²	655	627300	7040666273007
H40 L 04	Grey	400	5 m ²	783	627301	7040666273014
H40 L 06	Grey	600	8 m ²	1005	627302	7040666273021
H40 L 08	Grey	800	10 m ²	1186	627303	7040666273038
H40 L 10	Grey	1000	13 m ²	1380	627304	7040666273045
H40 L 12	Grey	1200	15 m ²	1548	627305	7040666273052
H40 L 14	Grey	1400	18 m ²	1760	627306	7040666273069

H40



H10



H30

Glamox® | Heating

glamoxheating.com



Designed for
nordic conditions



Quality through
generations



Five years
warranty

MANUFACTURED BY:

Adax AS | Myhresgt. 1 | 3060 Svelvik | Norway
Tel. +47 33 77 17 50 | E-mail: info@adax.no